

IP68



- Usual: AC220V/DC12V
- ATEX Zone 1&2 / 21&22
- High quality IR lamp, long service life, irradiation distance up to 100 meters
- Made of 304 stainless steel material (316,316L for optional)
- resolution up to 1920 x 1080 pixel, 18X Zoom

### EX Marking




### Certification



### Markets



	<b>Ex-Level</b>	ATEX II 2G Ex d IIC T6 Gb II 2D Ex tb IIIC IP68 T80°C Db
	<b>Ingress Protection level</b>	IP68
specifications	<b>Temperature range</b>	-40°C~60°C
	<b>Relative humidity</b>	≤ 95% (+25°C)
	<b>Atmospheric pressure</b>	80kpa~106 kpa
	<b>Thermostat System</b>	optional
	<b>Supply voltage</b>	DC12V /AC220V (optional) /POE (Optional)
	<b>Suitable Environment</b>	Apply to explosive gas and combustibile dust environment
	<b>Material</b>	304 stainless steel (316L for optional)
	<b>Inlet interface specifications</b>	2pcs M25*1.5 output (original G3/4)
	<b>Installation method</b>	PTZ, Wall Hanging dyadic, fixed bracket, Pillar base
	<b>Inside dimension</b>	Φ100mm*300mm (length)
	<b>Windows area</b>	Φ65
	<b>Wave length</b>	808nm
	<b>Infrared distance</b>	50MM 100M optional
<b>Infrared switch</b>	When <0Lux, auto open	



**WV-U1132A**  
**WV-U1142A**



[WV-U1132A Product Data Sheet](#)  
[WV-U1142A Product Data Sheet](#)



**WV-S1132**  
**WV-S1136A**



[WV-S1132 Product Data Sheet](#)  
[WV-S1136A Product Data Sheet](#)




**NBN-73023-BA**




[NBN-73023-BA Product Data Sheet](#)

### Technical Drawing

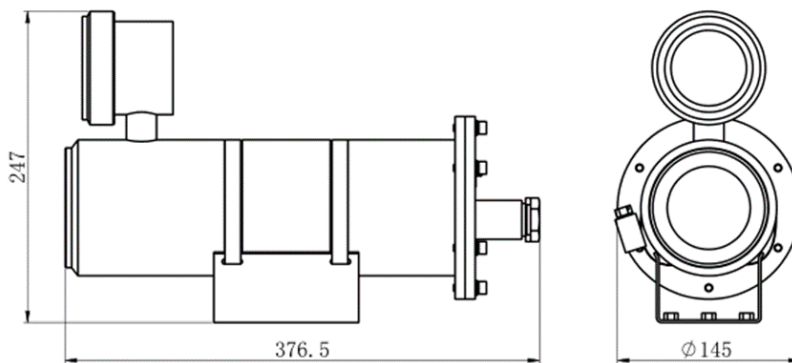

安装尺寸:



**VT-B02**  
Bracket for B series



**VT-B04**  
Bracket for B series



**VT-B03**  
Bracket for B series

