


IP66



- ATEX Zone 1 & 2
- Certification: ATEX - CNEX
- The body is made of carbon steel and PC cover
- Pollution level: Level 3
- Emergency light with/without **battery**  
(Can be customized)

### EX Marking

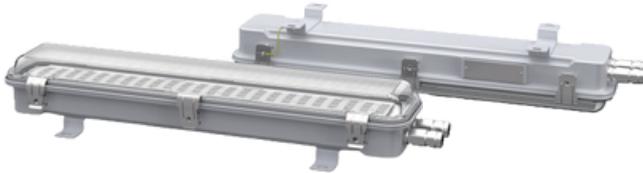



### Certification






### Markets



	<b>Ex-Level</b>	II 2G Ex db eb mb IIC T5 Gb II 2D Ex tb IIIC T95°C Db
	<b>Ingress Protection level</b>	<b>IP66</b>
specifications	<b>Model</b>	<b>VT-EXLNX series</b>
	<b>Corrosion-proof level</b>	<b>WF2</b>
	<b>Power (W)</b>	<b>20W, 30W, 40W, 60W</b>
	<b>Voltage - Frequency</b>	<b>AC110-277V , 50/60 Hz</b>
	<b>Luminaire Efficiency</b>	<b>130lm/W±5</b>
	<b>PF</b>	<b>≥0.9</b>
	<b>CCT</b>	<b>3500K ~6500K</b>
	<b>RA</b>	<b>&gt;80</b>
	<b>Net Weight</b>	<b>≈ 2.6Kg / 4.5kg</b>
	<b>Battery pack Type</b>	<b>Ni-cd LiFePO (can order with/without battery)</b>
	<b>Voltage and capacity (Battery)</b>	<b>3.6V-3.0Ah / 9.6V-3.5Ah</b>
	<b>Emergency power</b>	<b>3.5W, 7W, 10W, 15W</b>
	<b>Emergency time</b>	<b>≥90min, ≥120min, ≥180min</b>
	<b>Rated Lifetime</b>	<b>&gt;50,000</b>
<b>Operating temperature</b>	<b>-40°C ~ +55°C</b>	

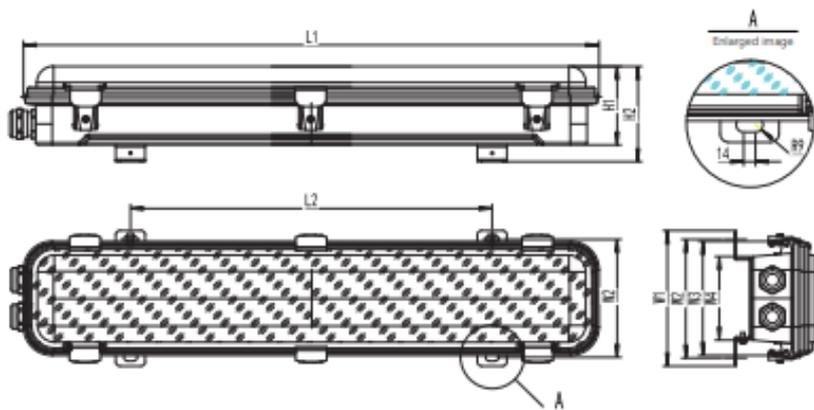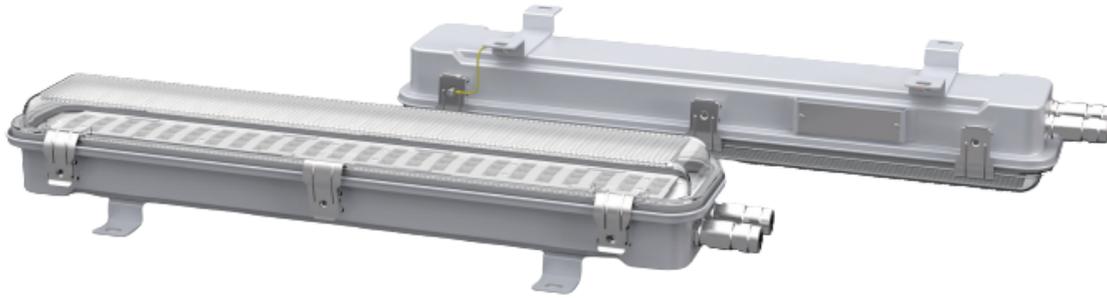

	L1	L2	W1	W2	W3	W4	H1	H2
20W/30W/40W	685	430	162	142	136	100	94	114
40W/60W	1305	970						

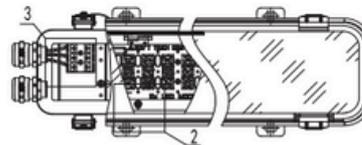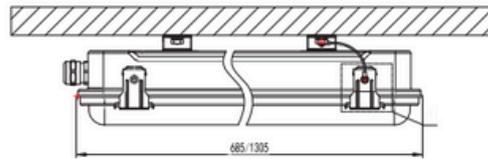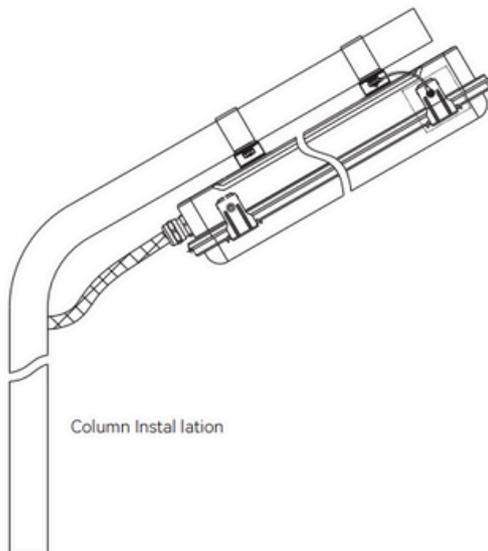

- First step: Loosen the buckle screw and open the PC lampshade
- Second step: Loosen the screws and open the light source mounting plate
- Third step: Securely connect external power cables to Ex terminal